

551,897

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number  
**WO 2004/086859 A1**

(51) International Patent Classification<sup>7</sup>: A01K 93/00

(21) International Application Number:  
PCT/SE2004/000463

(22) International Filing Date: 26 March 2004 (26.03.2004)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:  
0300980-0 4 April 2003 (04.04.2003) SE

(71) Applicant and

(72) Inventor: KUMLIN, Krister [SE/SE]; Källbyn - Solbacken, S-662 96 Svanskog (SE).

(74) Agent: L-O LUNDQUIST PATENTBYRÅ AB; Box 80, S-651 03 Karlstad (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

[Continued on next page]

(54) Title: FLOAT WITH ADJUSTABLE BUOYANCY

(57) Abstract: A float including at least two structural members (1, 10), enclosing a cavity (16) having a volume which is variable by means of a relative movement of the structural members, said relative movement resulting in a change of the buoyancy of the float. According to the invention, the float includes a volume (19) which is intended to be filled with water through an opening (20) when the float is immersed in water, as well as an evacuating duct through which air is intended to flow out of the volume when the water flows in through the opening.

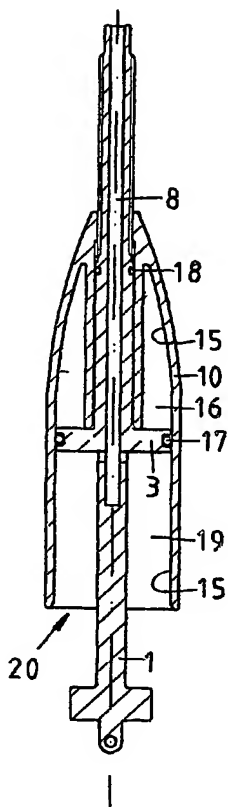

WO 2004/086859 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*